

arozim



gIMU-3G[®]

Tactical Grade IMU System

The gIMU-3G[®] is ultra miniature tactical grade Inertial Measurement Unit based on most advanced commercially available MEMS-Based sensors.

The gIMU-3G[®] contains Hi-Performance best-in-class sensors (3-axis Accelerometers, 3-axis Gyros) and can replace FOG-based systems providing superior C-SWaP features and improve system robustness, size, power-consumption and cost.

Built-In 32-Bit ARM Cortex-M7 MicroProcessor handles all data acquisition functions from the sensors, including calculations, compensations/calibration tasks & communication as well.


The gIMU-3G[®] is factory-calibrated over Temperature, Bias, Scale-Factor, Cross-Axis & Mis-Alignment and G-Sensitivity.

Main Features

- Tactical Grade Gyro & Accelerometer
- Very Low VRE (Vibration Rectification Error)
- Update Rate of up to 2,000 Hz
- Wide Voltage Input Range 9 VDC – 32 VDC
- Low Power < 100mA @ 12 VDC
- Miniature, Light Weight
- Optional Magnetometer & Baro Altimeter
- ITAR Free

Applications

- UAV/UGV
- Smart Ammunition
- Gimballed Cameras
- Platform Stabilization
- Loitering munition
- Antenna Tracking Systems

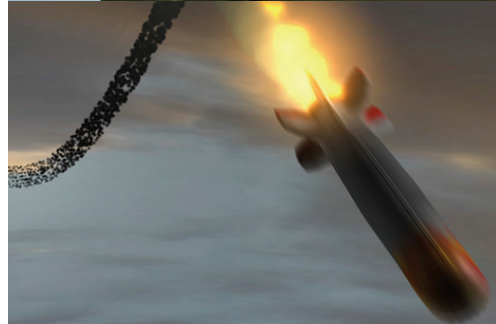



Parameter	Accelerometer	Gyroscope	Remarks
Full Scale Range	± 10g	± 500 deg/sec	others upon req.
Bandwidth	0...250 Hz	0...250 Hz	
Non Linearity	2000 ppm	200 ppm	1σ, FS
Bias Stability	< 20 µg	0.8 °/Hr	Allan-Variance
Repeatability ToTo	± 300 µg	< 20°/Hr	
Day-to-Day	< 400 µg	< 15°/Hr	
One Year	1,500 µg	< 40°/Hr	
Over Full Temp	< 500 µg	< 60°/Hr	
Over 20°C Span	< 150 µg	< 20°/Hr	
Hysteresis	300 µg	< 30°/Hr	
Scale Factor	500 ppm	500 ppm	
Repeatability	100 ppm	500 ppm	
Over Temp			
Random Walk	< 0.02 m/sec/√Hr	0.07 °/√Hr	
Noise density	< 20 µg /√Hz	< 0.003 °/sec/√Hz	
VRE (Vibration Rectification Error)	< 100 µg/g2	< 1 °/hr/g2	3g RMS, 20-2000 Hz
g-Sensitivity	n/a	< 10 °/Hr/g	
Latency		< 1 mSec	
Non-Orthogonality		< 300 µRad	1σ
MisAlignment		< 1 mRad	1σ

System & Communication

Output Options	Ax, Ay, Az, ωx, ωy, ωz, Temp Mx, My, Mz, mBar, Temp Conning & Sculling
Digital Interface	RS232/RS422
Frame Rate	0...2000 Hz
Start Up Time	< 50 mSec
Warm-Up Time To Full Performance	< 5 sec

Power & Mechanical

Input Voltage	9 VDC - 32 VDC
Power Consumption	< 100 mA @ 12 VDC
Connectors	9-pin Micro D-Type
Size	42 x 30 x 24 mm
weight	< 42 gr

Environmental Conditions (Design-to-Spec)

Temp Operation	-40° C to +71° C	Mil-Spec 810-G Method 501.5 Procedure I
Mechanical Shock		
Operational	40g, 10 msec, ½ Sine	
Non-Operational	500g, 0.5 msec, ½ Sine	
Vibration	3 Grms, 20-2000 Hz 6 Grms, 20-2000 Hz	Operational Endurance
Altitude	70,000 feet	Mil-Spec 810-G Method 500.5 Procedure III
Enclosure	IP65	EN 595
MTBF	100,000 Hours	GM@ 65°c
EMC	EN55022 Class B	Conducted & Radiation Emission
ESD	IEC 61000-4-2	

* Specification subject to change without notice